

Project:	Quantity:	
Model #:	Approval:	

For Commercial Use Only

AOC-46-B 46" Black Open Air Refrigerated Display Merchandiser



FEATURES

- · Digital controller
- · Automatic defrost
- · LED light for every shelf
- · An optional external drain included
- · Energy-saving with night curtain
- · Easy to use
- · 4 adjustable shelves
- · With price tag
- · 33°F to 40°F temperature range
- cETLus

Coldline AOC-46-B 46" black refrigerated air curtain merchandiser features LED lighting for each (4) shelf, and will improve impulse sales while keeping your salads, dairy, deli or baked goods at safe cold temperatures. The built-in drain pan heater is designed for condensation evaporating. Standard 115V plug makes set up easy. Just plug it in and turn it on!

cETLus Listed



USR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.



Datasheet

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

TECHNICAL DATA

DIMENSIONS

Exterior Dimensions	45.7"W x 25.6"D x 81.5"H
Interior Dimensions	42"W x 17.9"D x 51.4"H
Packaging Dimensions	46.9"W x 28"D x 85.5"H
Net Volume	14 cu. ft.
Unit Weight	397 lb.
Shipping Weight	440 lb.

ELECTRICAL

Voltage	115
Hertz	60
Phase	1
Amps	12.5
Plug Type	NEMA 5-15P
Power Cord Length	98"

COOLING

Temperature Range	33°F to 40°F
Refrigerant	R290
Max. Ambient Temp	75°F
Max. Humidity	55% RH
Defrosting	Automatic
Temperature Controller	Digital

CONSTRUCTION


Exterior Material	Coated steel
Exterior Color	Black
Interior Material	Coated steel
Insulation Material	Foamed-in-Place Polyurethane
Shelf Size	(4) 42"W x 11.42"D
Shelf Load Capacity	99 lb.
Shelf Material	Coated Steel
Adjustable Shelf	Yes
Interior Light	L.E.D


TECHNICAL DRAWING

MODEL: AOC-46-B

MFR ITEM #: LD3-2Z(C4)





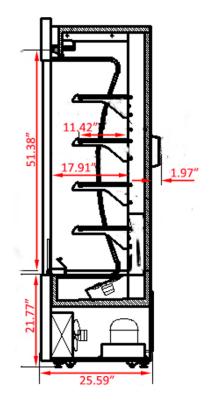

- Designed to operate in locations not exceeding 75°F and 55% relative humidity.



Rev. 08-2024