


# Gas Ranges

## PRODUCT SPECIFICATIONS

- 30,000 BTU per top burner (NG)
- 12" x 12" cast iron grates with aeration bowl
- Standing pilot light for individual burners
- 33,000 BTU each static oven (NG)
- Oven interior side guides & bottom porcelain coated
- Oven thermostat adjusts from 200°F - 500°F
- Manual gas controls
- Stainless steel front, back riser, and lift off shelf
- Stainless steel legs standard
- "Cool-to-the-touch" front s/s deck
- Flue located on back of unit for ample ventilation
- Easy to remove full width crumb tray
- Range is fully serviceable from the front

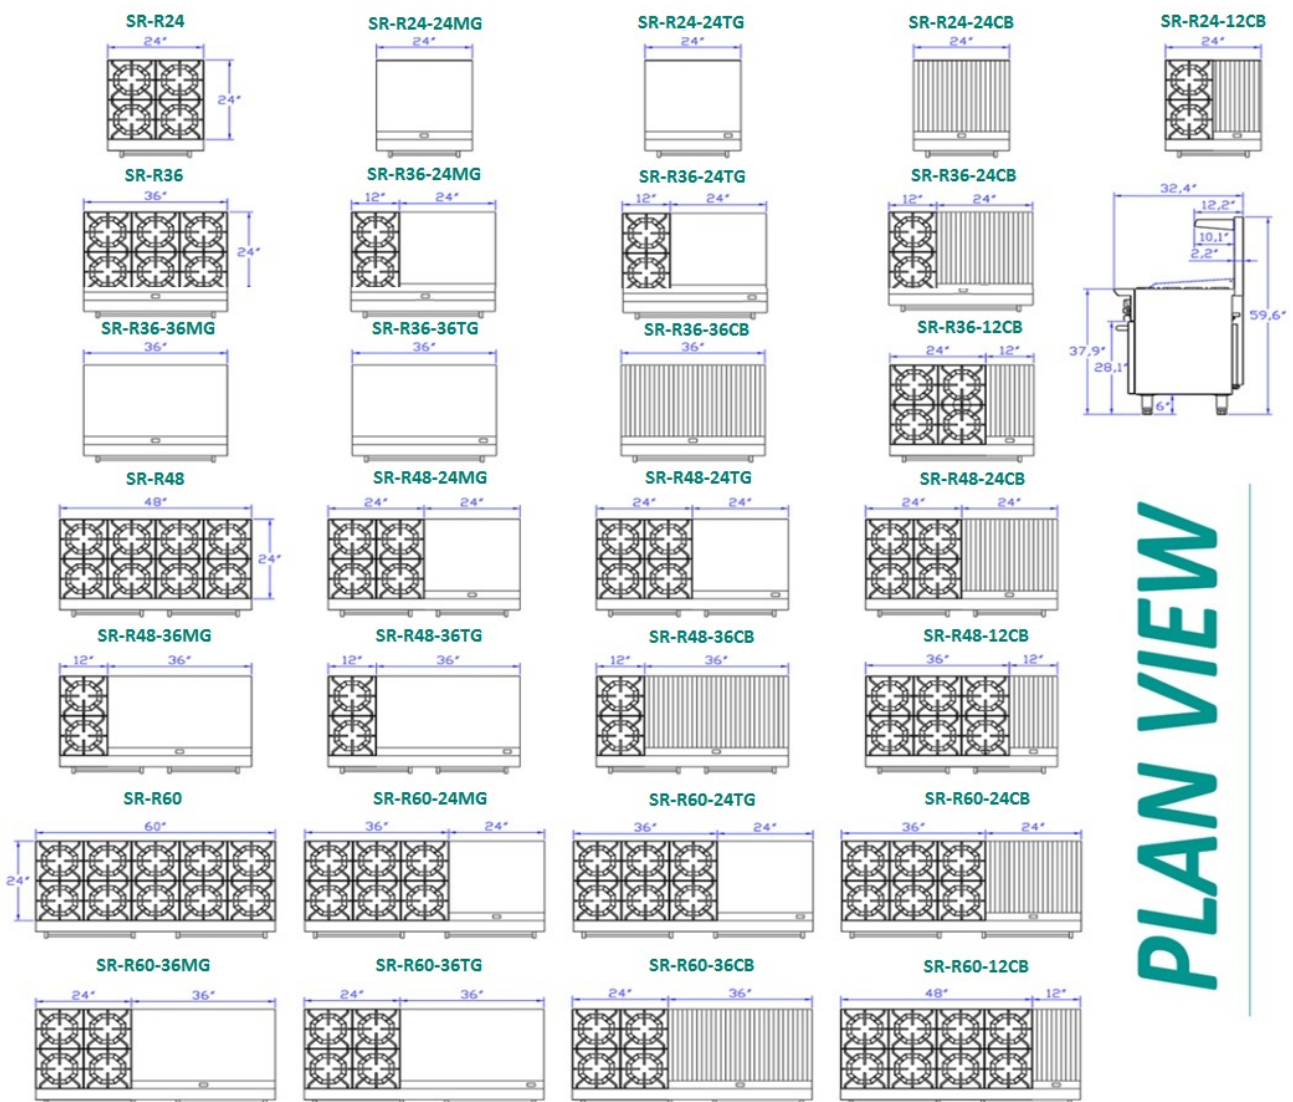

PLAN VIEW

Model	Gas Type	Number of Burners	Griddle	Charbroiler	OVEN	Total BTU	Product Dimensions			Net Wt.
							Width	Depth	Height	
SR-R24	NG	4	--	--	1	153,000	24"	32"	59"	268 lbs
SR-R24-24MG	NG	--	24"	--	1	93,000	24"	32"	59"	340 lbs
SR-R24-24CB	NG	--	--	24"	1	103,000	24"	32"	59"	306 lbs
SR-R36	NG	6	--	--	1	123,000	36"	32"	59"	364 lbs
SR-R36-24MG	NG	2	24"	--	1	153,000	36"	32"	59"	418 lbs
SR-R36-36MG	NG	3	36"	--	1	123,000	36"	32"	59"	455 lbs
SR-R36-24CB	NG	2	--	24"	1	163,000	36"	32"	59"	372 lbs
SR-R48	NG	8	--	--	2	306,000	48"	32"	59"	525 lbs
SR-R48-24MG	NG	4	24"	--	2	246,000	48"	32"	59"	579 lbs
SR-R48-24CB	NG	4	--	24"	2	256,000	48"	32"	59"	538 lbs
SR-R60	NG	10	--	--	2	366,000	60"	32"	59"	621 lbs
SR-R60-24MG	NG	6	24"	--	2	306,000	60"	32"	59"	675 lbs
SR-R60-24CB	NG	6	--	24"	2	316,000	60"	32"	59"	637 lbs

- . 3/4" NPT gas connection
- . NG gas 5" W.C. ; LP gas 10"W.C.
- . Legs adjustable from 6"-7 1/2" total leg height.

. Certification:

