

Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

# Unity U-40M 39" Two Glass Door Merchandiser Refrigerator with LED Lighting



## **FEATURES**

- · Two swing glass doors with handle for easy access
- · Easy to use digital temperature controls
- · High-density polyurethane insulation
- · Temperature range: 32-50 degrees F
- · 2 vertical brilliant LED lights
- · Ergonomic door handles
- · Automatic defrost
- · Magnetic door gasket
- · Lighted top panel
- · 8 heavy-duty, adjustable PVC-coated shelves
- · 4 pre-installed low-profile casters, 2 leveling feet
- · Hydro-Carbon R290 refrigerant
- Anti-fogging tempered self-closing glass doors
- · Bottom mounted refrigeration system
- 90" length power cord, NEMA 5-15P plug
- cETLus Listed

 ETL Sanitation Listed Conforms to UL & NSF Standards





SR Brands is a US supplier of premium quality commercial cooking, refrigeration and food preparation equipment. Our aim is simple. Produce industry-leading commercial restaurant equipment at reasonable prices, and back it all up with an easy to understand, no nonsense warranty that people can count on.

**Page 586** 



Project:	Quantity:
Model #:	Approval:

For Commercial Use Only

# **TECHNICAL DATA**

### **DIMENSIONS**

Exterior Dimensions	39.37"W x 23.23"D x 79.33"H
Interior Dimensions	36.22"W x 17.91"D x 50.59"H
Packaging Dimensions	42"W x 25"D x 80"H
Net Volume	22 cu. ft.
Unit Weight	227 lb.
Shipping Weight	261 lb.

#### **ELECTRICAL**

Voltage	115
Hertz	60
Phase	1
Amps	3.5
Watts	380W
Plug Type	NEMA 5-15P
Power Cord Length	90"

### **COOLING**

Temperature Range	32°F to 50°F
Refrigerant	R290
Defrosting	Automatic
Temperature Controller	Digital

### **CONSTRUCTION**


Exterior Material	Coated Steel
Exterior Color	Black
Interior Material	Coated Steel
Insulation Material	Foamed-in-Place Polyurethane
Door Style	Swing
Door Type	Glass
Shelf Size	(8) 17.4"W x 14.7"D
Shelf Material	PVC Coated Steel
Adjustable Shelf	Yes
Interior Light	L.E.D
Mobility Wheels/Casters	(4) Casters, 2 Leveling Feet


# **TECHNICAL DRAWING**

MODEL: U-40M

MFR ITEM:



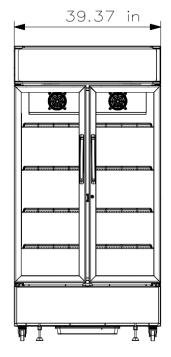

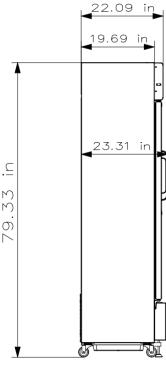

Rev. 03-2025